




Scan results for drinkperfy.com

Compliant

Great news! Based on our scan, your webpage is accessible and conforms with WCAG standards.

 **accessWidget** is detected on the website


Thank you for making your website accessible and inclusive for all users with  **accessiBe**

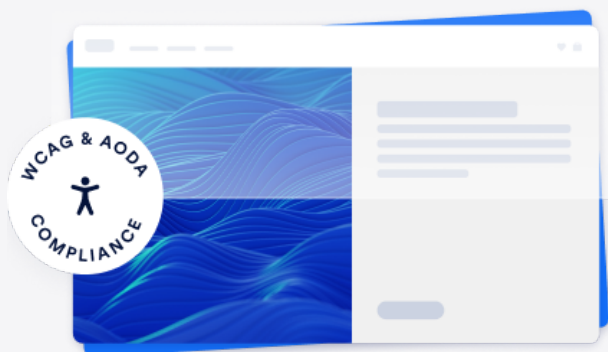

Congratulations!
Your website is among the 3% of inclusive and accessible websites globally. Well done!

In the report you'll find the results for dozens of tests focusing mainly on these categories:

- ✓ **Screen-reader** adjustments (blind users)
- ✓ **Keyboard navigation** adjustments (motor impaired)
- ✓ **UI, design and readability** adjustments (vision impaired)

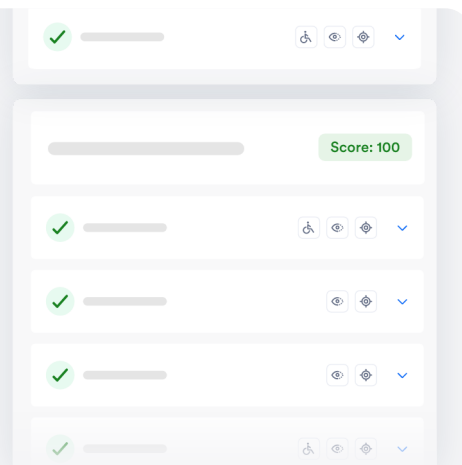

#	Element	Relevant	Successes	Failures	Score
1	Elements that behave as buttons but are built using other tags such as span, div, a or others, should include a "role" attribute that equals to "button".	Yes	4	0	100

Successful Elements

```
<button class="needsclick go3456990361 kl-private-reset-css-Xuajs1 " type="button" style="undefined;background: rgb(42, 15, 63); border-radius: 6px; border-style: none; border-color: rgb(29, 29, 29); border-width: 2px; color: rgb(255, 255, 255); fon ...
```

```
<button class="needsclick klaviyo-close-form kl-private-reset-css-Xuajs1" style="right: 0px; top: 0px; position: absolute; z-index: 6; cursor: pointer; height: 25px; width: 25px; margin-right: 8px; margin-top: 8px;" role="button"><span data="tr ...
```

```
<button class="needsclick go1836112351 kl-private-reset-css-Xuajs1" type="button" style="background: rgb(255, 216, 79); border-radius: 8px; border-style: none; border-color: rgb(150, 54, 139); border-width: 2px; color: rgb(42, 15, 63); font-family: s ...
```

```
<button class="needsclick go1836112351 kl-private-reset-css-Xuajs1" type="button" style="background: rgb(42, 15, 63); border-radius: 2px; border-style: none; border-color: rgb(0, 0, 0); border-width: 1px; color: rgb(255, 255, 255); font-family: sofia ...
```

2	Buttons should include text explaining their functionality, and if icons are used as buttons, a screen-reader only text or an "aria-label" attribute should be used for that description.	Yes	4	0	100
---	---	-----	---	---	-----

Successful Elements

```
<button class="needsclick go3456990361 kl-private-reset-css-Xuajs1 " type="button" style="undefined;background: rgb(42, 15, 63); border-radius: 6px; border-style: none; border-color: rgb(29, 29, 29); border-width: 2px; color: rgb(255, 255, 255); fon ...
```

```
<button class="needsclick klaviyo-close-form kl-private-reset-css-Xuajs1" style="right: 0px; top: 0px; position: absolute; z-index: 6; cursor: pointer; height: 25px; width: 25px; margin-right: 8px; margin-top: 8px;" role="button"><span data="tr ...
```

```
<button class="needsclick go1836112351 kl-private-reset-css-Xuajs1" type="button" style="background: rgb(255, 216, 79); border-radius: 8px; border-style: none; border-color: rgb(150, 54, 139); border-width: 2px; color: rgb(42, 15, 63); font-family: s ...
```

```
<button class="needsclick go1836112351 kl-private-reset-css-Xuajs1" type="button" style="background: rgb(42, 15, 63); border-radius: 2px; border-style: none; border-color: rgb(0, 0, 0); border-width: 1px; color: rgb(255, 255, 255); font-family: sofia ...
```

3 Links should include text that is setting expectations to Yes what page they are leading to. If empty links are used as layout wrapping elements, a screen-reader only text or an "aria-label" attribute should be used for that description.

59

0

100

Successful Elements

```
<a href="/products/variety-pack-12-cans" class="announcement-bar__link link link-text focus-inset animate-arrow" ><p class="announcement-bar__message h5 " style=";background-color:#ffffff!important;color:#000000!important;"> 📦 Ge ...
```

```
<a href="/products/variety-pack-12-cans" class="header__menu-item-link text-[27px] leading-[0.85] uppercase font-bold focus-inset" data-acsb-menu="a" data-acsb-menu-root-link="true"> <span style=";background-color:#ffffff!import ...
```

```
<a href="/" class="block py-4 my-2" > <div class="brandmark w-screen mx-auto max-w-[160px] relative"> <div class="pb-[36.25%]"></div> <div class="svg-wrap svg-wrap--full-width absolute inset-0"> ...
```

```
<a href="/pages/store-locator" class="header__menu-item px-4 py-2 block text-lg font-normal underline hover:no-underline focus:no-underline list-menu__item link link--text focus-inset " data-acsb-menu="a" data-acsb-menu-root-link="true" style=";ba ...
```

```
<a href="https://www.drinkperfy.com/pages/reviews" class="header__menu-item px-4 py-2 block text-lg font-normal underline hover:no-underline focus:no-underline list-menu__item link link--text focus-inset " style=";background-color:#ffffff!important;rtan ...
```

```
<a href="/pages/our-story" class="header__menu-item px-4 py-2 block text-lg font-normal underline hover:no-underline focus:no-underline list-menu__item link link--text focus-inset " style=";background-color:#ffffff!important;color:#000000!important;rtan ...
```

```
<a href="https://discover.gotoaisle.com/perfy" class="header__menu-item px-4 py-2 block text-lg font-normal underline hover:no-underline focus:no-underline list-menu__item link link--text focus-inset " style=";background-color:#ffffff!important;co ...
```

```
<a href="/pages/perfy-vs-big-soda" class="header__menu-item px-4 py-2 block text-lg font-normal underline hover:no-underline focus:no-underline list-menu__item link link--text focus-inset " style=";background-color:#ffffff!important;color:#000000! ...
```

```
<a href="https://drinkperfy.com/pages/recipes" class="header__menu-item px-4 py-2 block text-lg font-normal underline hover:no-underline focus:no-underline list-menu__item link link--text focus-inset " style=";background-color:#ffffff!important;co ...
```

```
<a href="/account/login" class="header__icon header__icon--account link focus-inset" > <svg xmlns="http://www.w3.org/2000/svg" aria-hidden="true" focusable="false" role="presentation" class="icon icon-account " preserveAspectRatio="xMidYMid m ee ...
```

4 Links that open in a new tab or a new window should either have an "aria-label" attribute or a screen-reader only element explaining to screen-readers that this opens in a new tab. Yes 4 0 100

Successful Elements

```
<a href="https://vm.tiktok.com/TTPdkGw8MY/" target="_blank" class="icon-TikTok inline-block mr-1" data-acsb-tooltip="TikTok | New Window" > <div class="w-12 h-12 p-1 svg-wrap text-white"> <svg viewBox="0 0 48 48" xmlns=" ...
```

```
<a href="https://www.instagram.com/drinkperfy" target="_blank" class="icon-Instagram inline-block mr-1" data-acsb-tooltip="Instagram | New Window" > <div class="w-12 h-12 p-1 svg-wrap text-white"> <svg viewBox="0 0 48 48 ...
```

```
<a href="https://www.facebook.com/drinkperfy" target="_blank" class="icon-Facebook inline-block mr-1" data-acsb-tooltip="Facebook | New Window" > <div class="w-12 h-12 p-1 svg-wrap text-white"> <svg aria-hidden="true" fo ...
```

```
<a href="https://twitter.com/drinkperfy" target="_blank" class="icon-Twitter inline-block mr-1" data-acsb-tooltip="Twitter | New Window" > <div class="w-12 h-12 p-1 svg-wrap text-white"> <svg aria-hidden="true" focusable ...
```

5 An H1 title provides information to blind-users using screen-readers of what the main topic of the page is and each page should have exactly one H1 title. Yes Pass - 100

Successful Elements

```
<h1 class="header__heading" role="heading" aria-level="1"><a href="/" class="block py-4 my-2" > <div class="brandmark w-screen mx-auto max-w-[160px] relative"> <div class="pb-[36.25%]"></div> <div cla ...
```

6 HTML title elements (H1-6) should have texts. If images or links are used, they should include an alternative or screen-reader only text. Yes 29 0 100

7 Elements that visually appear as titles but are coded with a non-heading HTML Tag should include a "role" attribute that equals to "heading" or have their tags fixed. Yes 2 0 100

Successful Elements

```
<p class="p-lg text-center " style=";background-color:#ffffff!important;color:#000000!important;" role="heading" data-acsb-fake-title="true" aria-level="5">We took everything bad out of traditional soda and replaced it with the best possible ingredients ...
```

```
<p class="p-lg " style=";background-color:#ffffff!important;color:#000000!important;" role="heading" data-acsb-fake-title="true" aria-level="5"> Sign up and get 10% off your first order + we'll plant a tree for every case sold and every t...
```

8 Title levels should not be skipped and should be built with consistent hierarchy. For example: you cannot have "h4" titles and "h2" titles without having "h3" titles. No 0 0

9 Interactive elements such as links, buttons and form fields should all be navigable using the keyboard by either using a focusable element (a, button, input, etc.) or including the "tabindex" attribute that equals to "0". Yes Pass - 100

Successful Elements

```
<summary class="header__menu-item-link text-[27px] leading-[0.85] uppercase font-bold inline-block pl-4 pr-10 py-3 pb-4 focus-inset relative" role="button" aria-controls="HeaderMenu-MenuList-right-1" tabindex="0" > <span >Adve ...
```

10 Interactive elements that can be navigated using the keyboard should be surrounded by a visual outline whenever they are focused. Yes Pass - 100

11 Active popups should include an "aria-modal" attribute that equals to "true", and a "role" attribute that equals to "dialog", so screen-reader users know how to navigate within it. Yes Pass - 100

Successful Elements

```
<div class="needsclick kl-private-reset-css-Xuajs1 " style="display: flex; z-index: 90000; position: fixed; left: 0px; top: 0px; width: 100%; height: 100%; justify-content: center; align-items: center; overflow: auto; background-color: rgba(20, 20, 20, 0.2) ...
```

12	Every page should include hidden links that by clicking Yes on them (either using keyboard navigation or a screen-reader), the user will "skip" certain blocks directly to main landmarks such as main content, menu or footer.	Pass	-	100
----	---	------	---	-----

13	Elements that are hidden using CSS manipulations (opacity, height, text-indent, off-canvas, etc.) should be wrapped inside an element with an "aria-hidden" attribute that equals to "false", or include it directly, and have it dynamically changed to "true" when they become visible.	No	0	0
----	---	----	---	---

14	Elements that are hidden using CSS manipulations (opacity, height, text-indent, off-canvas, etc.) should include a "tabindex" attribute that is below 0, and have it dynamically changed to 0 when they become visible.	No	0	0
----	---	----	---	---

15	Menus should either be built using the HTML5 "nav" element or include a "role" attribute that equals to "menu" or "navigation" to indicate a navigation landmark for screen-readers.	Yes	5	0	100
----	--	-----	---	---	-----

Successful Elements

```
<nav class="header__menu hidden lg:flex lg:justify-center" role="navigation" data-acsb-main-menu="true" aria-label="Main Menu"> <ul class="header__primary-navigation flex justify-between items-center" role="list" data-acsb-menu="ul" ><li class = ...
```

```
<ul id="menu-shop" class="link-list-basic" data-acsb-menu="ul" ><li data-acsb-menu="li" data-acsb-menu-root="true"> <a href="/products/fruity-variety-pack" class="inline-block transition-colors duration-500 " data-acsb-menu="a" data-acsb-menu-ro ...
```

```
<ul id="menu-adventure" class="link-list-basic" data-acsb-menu="ul" ><li data-acsb-menu="li" data-acsb-menu-root="true"> <a href="/pages/our-story" class="inline-block transition-colors duration-500 " data-acsb-menu="a" data-acsb-menu-root-link= ...
```

```
<ul id="menu-support" class="link-list-basic" data-acsb-menu="ul" ><li data-acsb-menu="li" data-acsb-menu-root="true"> <a href="https://drinkperfy.com/a/account/login" class="inline-block transition-colors duration-500 " data-acsb-menu="a" data-acsb-menu-root-link= ...
```

```
<ul id="menu-footer-utility" class="link-list-basic" data-acsb-menu="ul" ><li data-acsb-menu="li" data-acsb-menu-root="true"> <a href="/policies/privacy-policy" class="inline-block transition-colors duration-500 " data-acsb-menu="a" data-acsb-menu-root-link= ...
```

16	Menu items that have a dropdown menu include an "aria-haspopup" attribute that equals to "true".	No	0	0
----	--	----	---	---

17 Menu items that have a dropdown menu include an "aria-expanded" attribute that equals to "false" that changes to "true" and back when opening or closing the dropdown. No 0 0

18 Images should have an alternative text description that describes both the objects and the embedded text that the image contains, using the "alt" attribute. Yes 26 0 100

Successful Elements

```

```

```

```

```

```

19 Background images that are not just for decoration purposes and should have the same treatment as standard images and include a "role" attribute that equals to "img" and an alternative text description in an "aria-label" attribute. No 0 0

20 Font icons, SVG or images that are being used as spacers, decorations or their purpose is already described by the content should include a "role" attribute that equals to "presentation" or "none". Yes 81 0 100

Successful Elements

```
<svg xmlns="http://www.w3.org/2000/svg" class="hidden" aria-hidden="true" style="background-color:#ffffff!important;color:#000000!important;" data-acsb-force-hidden="true" > <symbol id="icon-search" viewBox="0 0 18 19" fill="none" > <path f i ...
```

```
<svg width="20" height="19" viewBox="0 0 20 19" xmlns="http://www.w3.org/2000/svg" style="background-color:#ffffff!important;color:#000000!important;" aria-hidden="true" data-acsb-force-hidden="true" > <path d="M19.4487 10.654V8.34766H0.4487 3V10.6 ...
```

```
<svg width="20" height="3" viewBox="0 0 20 3" xmlns="http://www.w3.org/2000/svg" style="background-color:#ffffff!important;color:#000000!important;" aria-hidden="true" data-acsb-force-hidden="true" > <path d="M19.7305 2.34056V0H0.44873V2.34056H19....
```

```
<svg viewBox="0 0 161 58" xmlns="http://www.w3.org/2000/svg" aria-hidden="true" data-acsb-force-hidden="true" ><path d="m111.264 43.786h-7.935c-.325 0-.583-.2617-.583-.5781v-31.2595c0-4.18049 1.663-11.190588 12.796-11.190588h2.093c.325 0 .583.261658 ...
```

```
<svg class="icon icon-checkmark color-foreground-text" aria-hidden="true" focusable="false" xmlns="http://www.w3.org/2000/svg" viewBox="0 0 12 9" fill="none" style="background-color:#ffffff!important;color:#000000!important;" data-acsb-force-hidden="true" ><path d="M11.5 0 12 9" ></path></svg>
```

```
<svg class="icon icon-close" aria-hidden="true" focusable="false" data-acsb-force-hidden="true" ><use href="#icon-close" ></use></svg>
```

```
<svg viewBox="0 0 375 60" fill="none" xmlns="http://www.w3.org/2000/svg" aria-hidden="true" data-acsb-force-hidden="true" > <path d="M130.222 32.4567C202.809 34.7258 254.559 14.1525 316.728 5.71796C336.485 3.08698 356.241 1.2921 375 0.0676079L375 ...
```



```
<svg viewBox="0 0 1440 195" fill="none" xmlns="http://www.w3.org/2000/svg" aria-hidden="true" data-acsb-force-hidden="true" > <path d="M1458 32.5001L1376.78 32.5001C1295.56 32.5001 1133.11 32.5001 970.667 54.1329C808.222 76.1719 673 129.929 483.3 ...
```

```
<svg viewBox="0 0 391 33" fill="none" xmlns="http://www.w3.org/2000/svg" preserveAspectRatio="xMinYMin slice" aria-hidden="true" data-acsb-force-hidden="true" > <path d="M391 23.6016L369.278 26.2322C347.556 28.7645 304.111 34.1732 260.667 32.718 ...
```

```
<svg viewBox="0 0 1462 126" fill="none" xmlns="http://www.w3.org/2000/svg" aria-hidden="true" data-acsb-force-hidden="true" > <path d="M1462 89.6442L1380.78 99.6358C1299.56 109.254 1137.11 129.797 974.667 124.475C812.222 119.526 649.778 89.6442 4 ...
```

21 Figure elements that are used to display images should not have a "role" attribute that equals to "none" and the image provide itself should provide the description using an "alt" attribute. 0 0

22 Every "area" element of a "map" tag should be regarded as a standard image and receive an alternative text description using an "alt" attribute. No 0 0

23 Small or hidden tracker pixel images (often used for analytics or marketing purposes) should include a "role" attribute that equals to "none" or "presentation" so they are excluded from screen-readers. No 0 0

24 Form fields should either include an "aria-label" attribute or a connected LABEL element describing the requirement of the field (email, phone, name, etc.). Yes 2 0 **100**

Successful Elements

```
<input id="email_32008830" class="needsclick go2204365539 kl-private-reset-css-Xuajs1" type="email" autocomplete="email" name="email" placeholder="Email" aria-labelledby="label-email_32008830" aria-invalid="false" options="[object Object]" style="und ...
```

```
<input id="email_83673713" class="needsclick go1156812487 kl-private-reset-css-Xuajs1" type="email" autocomplete="email" name="email" placeholder="your email" aria-label="your email" aria-invalid="false" options="[object Object]" style="box-sizing: b ...
```

25 Form elements cannot have the same ID, or else their corresponding label will provide false information. No 0 0

26 Required form fields should include an "aria-required" attribute that equals to "true" so blind users using screen-readers know their validation. No 0 0

27 The validity status of every form element must be represented in the code at all times using the "aria-invalid" attributes and the "true/false" values, and change dynamically when the status changes. No 0 0

28 aria-describedby and aria-labelledby attributes should be connected by ID to an element that either has text description or an "aria-label" attribute. Yes 2 0 100

Successful Elements

```
<input id="email_83673713" class="needsclick go1156812487 kl-private-reset-css-Xuajs1" type="email" autocomplete="email" name="email" placeholder="your email" aria-label="your email" aria-invalid="false" options="[object Object]" style="box-sizing: b ...
```

```
<input id="email_32008830" class="needsclick go2204365539 kl-private-reset-css-Xuajs1" type="email" autocomplete="email" name="email" placeholder="Email" aria-labelledby="label-email_32008830" aria-invalid="false" options="[object Object]" style="und ...
```

29 All forms should have a submission button that is built as an input type "submit" or a "button" element, or include a "role" tag that equals to "button". Buttons can be hidden if the form can be submitted using the Enter key. Yes 2 0 100

Successful Elements

```
<form class="needsclick klaviyo-form klaviyo-form-version-cid_1 kl-private-reset-css-Xuajs1" data-testid="klaviyo-form-S9m9dp" style="undefined;display: flex; flex-direction: row; box-sizing: border-box; width: 100%; overflow: visible; max-width: 45 ...
```

```
<form class="needsclick klaviyo-form klaviyo-form-version-cid_3 kl-private-reset-css-Xuajs1" data-testid="klaviyo-form-YAbymg" style="display: flex; flex-direction: row; box-sizing: border-box; width: 780px; min-width: 200px; max-width: 1000px; borde ...
```

30 Search forms should include a "role" tag that equals to "search" (or be wrapped by one) to indicate a search landmark for screen-readers. No 0 0

31 The title tag of the HEAD section (also the title that appears in the browser tab and Search Engine result pages) should exist and describe the name of the current webpage for screen-reader users. Yes Pass - 100

Successful Elements

```
<title> Low Sugar, Low Carb, Keto Certified, Nootropic, Healthy Soda | Perfy </title>
```

32 The HTML tag should include a "lang" attribute that represents the main language of the webpage so screen-readers can calibrate on it for blind users. Yes Pass - 100

Successful Elements

```
<html class="js acsb-light-contrast" lang="en" data-spcbl="true" style="--acsb-keynav:3px;" id="acsb-light-contrast"><head> <!-- BEGIN NOVEL SNIPPET --><!-- END NOVEL SNIPPET --> <script type="text/javascript" async="" src="https://cdn.shopify.com/assets/javascripts/vendor/jquery.min.js"></script></head><body class="font-sans"><div class="hero-section"><h1>Shopify</h1></div></body></html>
```

33 The meta viewport tag should allow vision impaired users to pinch-zoom at least double the standard scaling using the user-scalable="yes" and maximum-scale={2 or higher} content strings. Yes Pass - 100

Successful Elements

```
<meta name="viewport" content="width=device-width,initial-scale=1">
```

34 Landmarks such as main content and footer should be built using their corresponding HTML5 element or include a description using an "aria-label" attribute and a "role" tag that equals to "contentinfo" or "main". Landmarks such as search and navigation are tested in other sections. Yes 3 0 100

Successful Elements

```
<main id="MainContent" class="content-for-layout focus-none" role="main" style="background-image: none;" data-acsb-main="true"> <section id="shopify-section-template--15767207936194__164130753535877b36" class="shopify-section hero-section"><div class="hero-section"><h1>Shopify</h1></div></section></main>
```

```
<footer class="footer bg-purple-dark relative text-white font-sans" data-acsb-page-footer="true" role="contentinfo" aria-label="Footer"> <div class="absolute footer-top text-purple-dark w-full z-10 svg-wrap"><svg viewBox="0 0 1440 33" fill="none"></svg></div></footer>
```

35 Font sizes should be at least 11px in size in order to stay readable in the majority of font families. This should be verified also when using dynamic units such as REM or percents. Yes Pass - 100

36 Letter spacing should not be set to below -1px in order to stay readable in the majority of font families. This should be verified also when using dynamic units such as REM or percents. Yes Pass - 100

Successful Elements

```
<p class="announcement-bar__message h5 " style=";background-color:#ffffff!important;color:#000000!important;"> 📦 Get FREE 1-2 Day Shipping on Prime 📦 <span class="w-5 h-5 inline-block ml-2 align-middle " style=";background-color:#ff ...
```

```
<span style=";background-color:#ffffff!important;color:#000000!important;">Shop Soda</span>
```

```
<span >Adventure</span>
```

```
<a href="/pages/store-locator" class="header__menu-item px-4 py-2 block text-lg font-normal underline hover:no-underline focus:no-underline list-menu__item link link--text focus-inset " data-acsb-menu="a" data-acsb-menu-root-link="true" style=";ba ...
```

```
<a href="https://www.drinkperfy.com/pages/reviews" class="header__menu-item px-4 py-2 block text-lg font-normal underline hover:no-underline focus:no-underline list-menu__item link link--text focus-inset " style=";background-color:#ffffff!important; ...
```

```
<a href="/pages/our-story" class="header__menu-item px-4 py-2 block text-lg font-normal underline hover:no-underline focus:no-underline list-menu__item link link--text focus-inset " style=";background-color:#ffffff!important;color:#000000!important; ...
```

```
<a href="https://discover.gotoaisle.com/perfy" class="header__menu-item px-4 py-2 block text-lg font-normal underline hover:no-underline focus:no-underline list-menu__item link link--text focus-inset " style=";background-color:#ffffff!important;co ...
```

```
<a href="/pages/perfy-vs-big-soda" class="header__menu-item px-4 py-2 block text-lg font-normal underline hover:no-underline focus:no-underline list-menu__item link link--text focus-inset " style=";background-color:#ffffff!important;color:#000000! ...
```

```
<a href="https://drinkperfy.com/pages/recipes" class="header__menu-item px-4 py-2 block text-lg font-normal underline hover:no-underline focus:no-underline list-menu__item link link--text focus-inset " style=";background-color:#ffffff!important;co ...
```

```
<h1 class="font-heading font-bold display-1 text-left w-full " style="line-height: .85;;background-color:#ffffff!important;color:#000000!important;" data-acsb-original-style="line-height: .85;" role="heading" aria-level="2"> boost moods. ...
```

Failed Elements

```
<button class="needsclick go1836112351 kl-private-reset-css-Xuajs1" type="button" style="background: rgb(42, 15, 63); border-radius: 2px; border-style: none; border-color: rgb(0, 0, 0); border-width: 1px; color: rgb(255, 255, 255); font-family: sofia ...
```

38 Carousels should include an "aria-label" attribute that equals to "carousel"/"slider" or something else that indicates the functionality, as well as be tagged as a landmark for screen-readers using a "role" tag that equals to "contentinfo". No 0 0

39 Control elements such as next and previous icons should include an "aria-label" attribute or a screen-reader only text that explains the functionality to screen-readers. No 0 0

40 A common accessibility mistake is to treat carousels as live regions using the "aria-live" attribute and the "polite" or the "assertive" values. Using this practice will cause screen-readers to cut and skip announcements. No 0 0

41 Carousel pagination items (usually used as small dots at the bottom of the carousel) should indicate their functionality and slide number they control using an "aria-label" and a screen-reader only text. No 0 0

42 Tables that are being used as layout structures should include a "role" attribute that equals to "presentation" to indicate to screen-readers that it is not really a table. No - Fail 0

Failed Elements

```
<table class="text-purple-dark bg-white w-full " style=";background-color:#ffffff !important;color:#000000 !important;"> <tbody><tr class="h-20"> <th class="px-1" data-acsb-force-hidden="true" aria-hidden="true" role="presentation" >< ...
```

43 If nested tables are used (a table element within a table cell), set the nested tables "role" attribute to "presentation". No 0 0

44 Tables that are missing a THEAD row with TH elements, should include a "role" attribute that equals to "rowheader" on the TD elements of the TR that represents the visual table headings. No 0 0

45 Visually deleted texts (often used to show a previous price of a sale) should include an "aria-label" attribute or a screen-reader only text that explains this is deleted text. No 0 0

46 Breadcrumbs main element should include a "role" attribute that equals to "navigation" and an "aria-label" attribute that describes the functionality." No 0 0

47 Ratings/scores that are represented visually using stars, meters or other indicators should either have an "aria-label" attribute or a screen-reader only texts conveying the score/rate. No 0 0

48 Making use of an accessibility interface helps to ensure that vision impaired users can adjust some of the UI and the design (font-size, colors, spacing, etc.) to their needs. It is not a compliance requirement, but can help to improve compliance. Yes Pass - 100

49 Iframe elements should include a "title" or an "aria-label" attribute explaining the purpose, the functionality or the destination of the iframe, or be tagged hidden for screen-readers if irrelevant. Yes 3 0 100

Successful Elements

```
<iframe src="https://drinkperfy.com/wpm@80cd6a5fw8efabb83pbabe92ddm0cb690ee/web-pixel-shopify-custom-pixel@0570/sandbox/modern/" id="web-pixel-sandbox-CUSTOM-shopify-custom-pixel-LAX-80cd6a5fw8efabb83pbabe92ddm0cb690ee" name="web-pixel-sandbox-CUSTOM ...
```

```
<iframe id="_hjSafeContext_34579058" tabindex="-1" aria-hidden="true" src="about:blank" style="display: none !important; width: 1px !important; height: 1px !important; opacity: 0 !important; pointer-events: none !important;" data-acsb-original-style ...
```

```
<iframe src="https://sdk.postscript.io/desktop.html?shopId=23878&shopShop=drinkperfy&sessionId=oiT5vQMMjnXbYi70SEf3r&status=&splitTests=&flags=log_headless_shops%2Cpopup_auto_apply_coupon%2Cpopup_auto_apply_fondue%2Cpopup_new_comp ...
```